


John Pawson
by
COCOON



FIX-01-USA

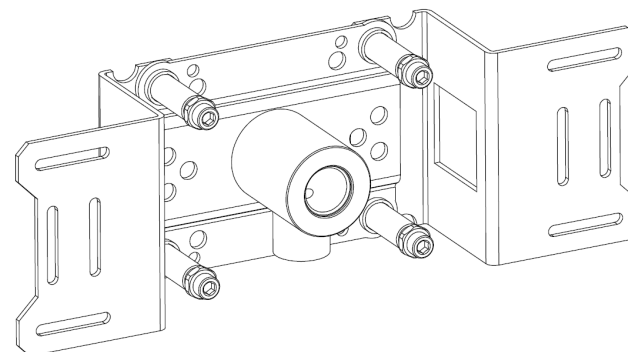






Please ensure you comply with the following instructions to optimise performance of the mixer:

- All pipework must be thoroughly flushed prior to installation
- For USA installation, please fix the USA NPT adapters on top of the pre-installed water connections
- Always first test the system with water pressure before closing the walls
- Optimal water pressure 3 BAR / temperature should not exceed 65°C/149°F
- Please read all installation instructions carefully

Failure to comply with manufacturers recommendations will void warranty

prof. incasso
min: 90
max: 100

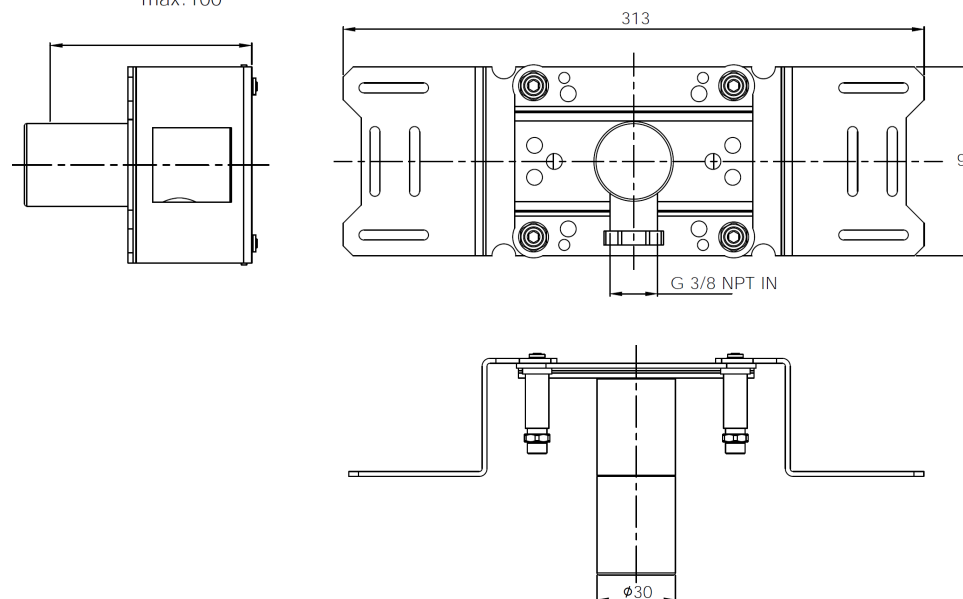

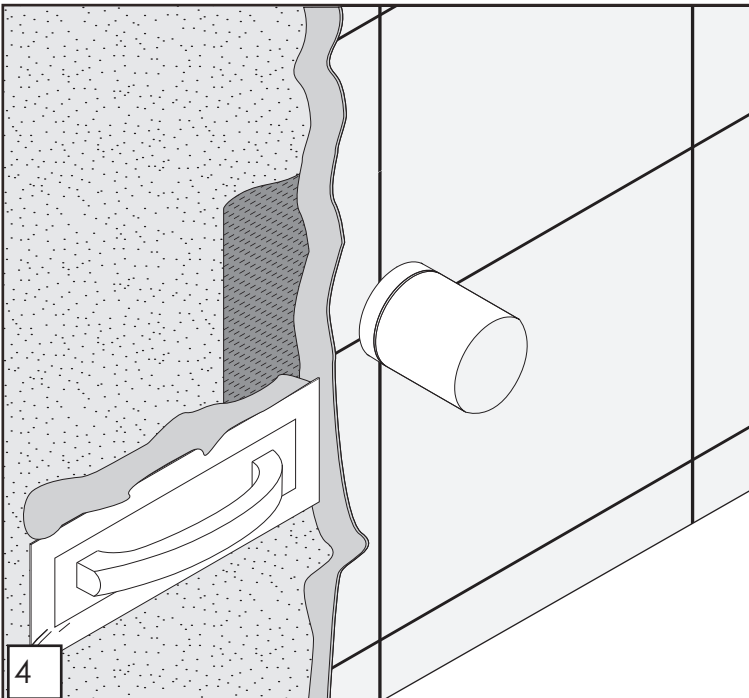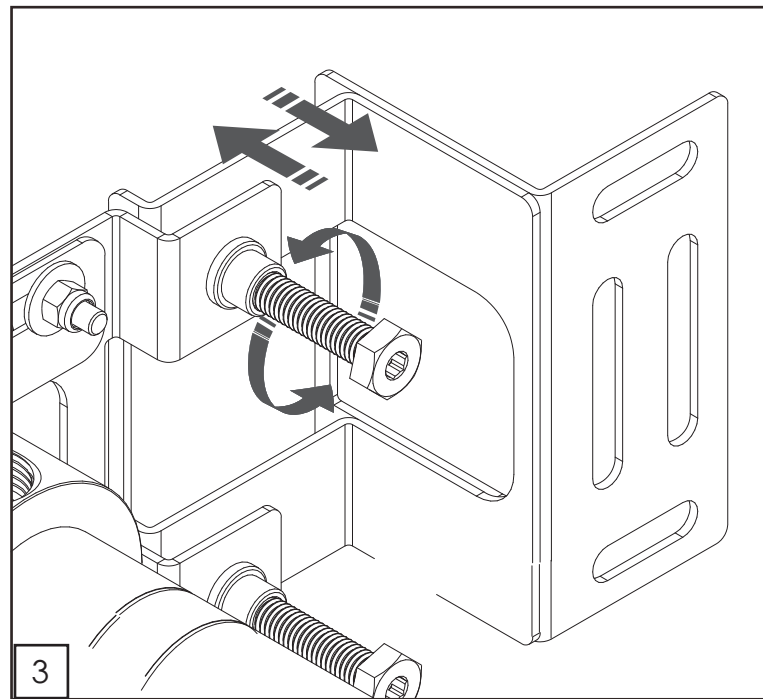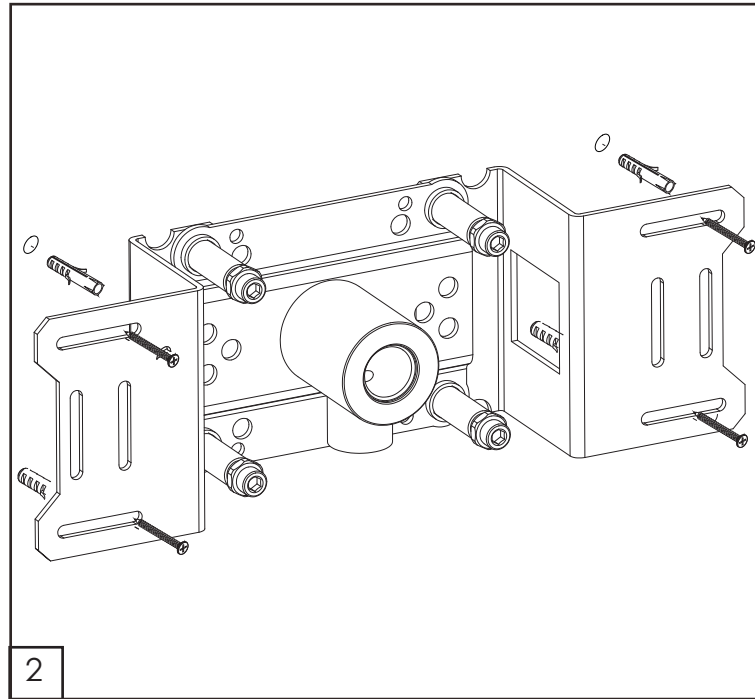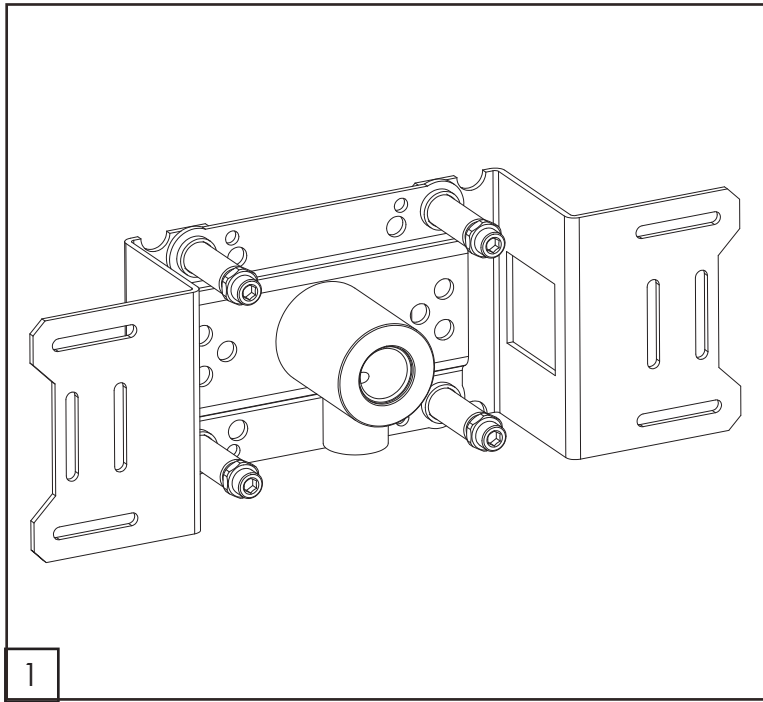

John Pawson by COCOON

FIX-01

Technical Warnings

The pipes have to be rinsed thoroughly before installation. Avoid pressure differences between hot & cold water supply. Use of a pressure reducer when static pressure is higher than 5 bars to avoid damage of the cartridge.