


# John Pawson by COCOON





JP-31




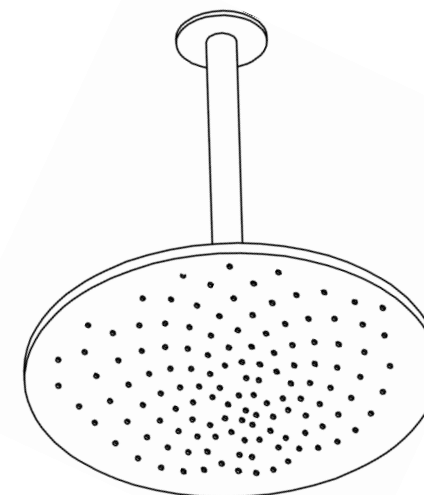


**Please ensure you comply with the following instructions to optimise performance of the mixer:**

- All pipework must be thoroughly flushed prior to installation
- For USA installation, please fix the USA NPT adapters on top of the pre-installed water connections
- Always first test the system with water pressure before closing the walls
- Optimal water pressure 3 BAR / temperature should not exceed 65°C/149°F
- Please read all installation instructions carefully

**Failure to comply with manufacturers recommendations will void warranty**

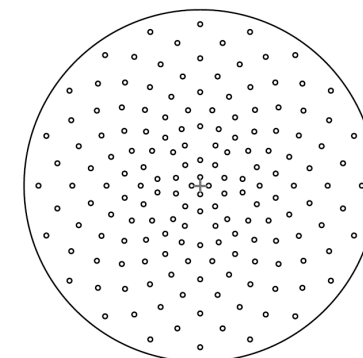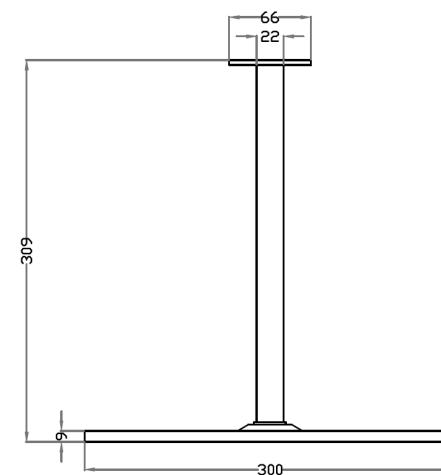

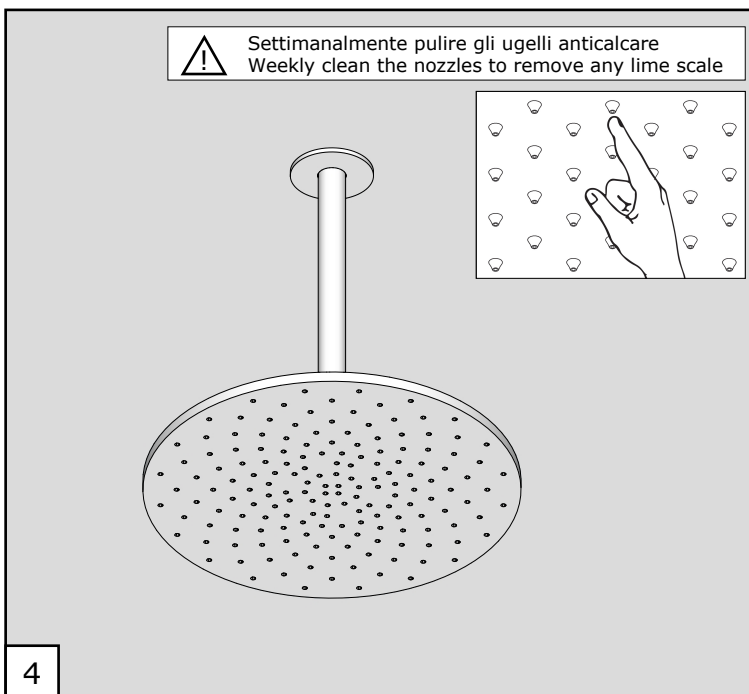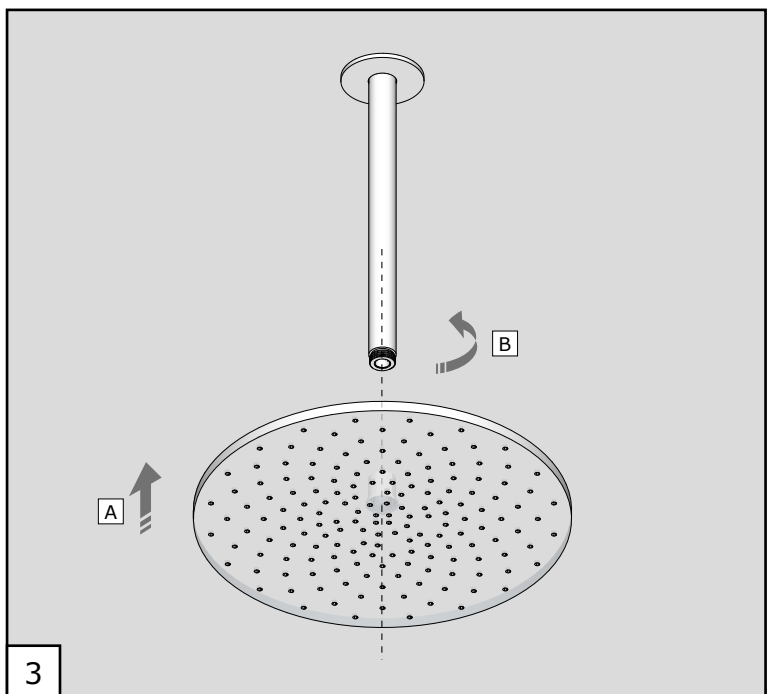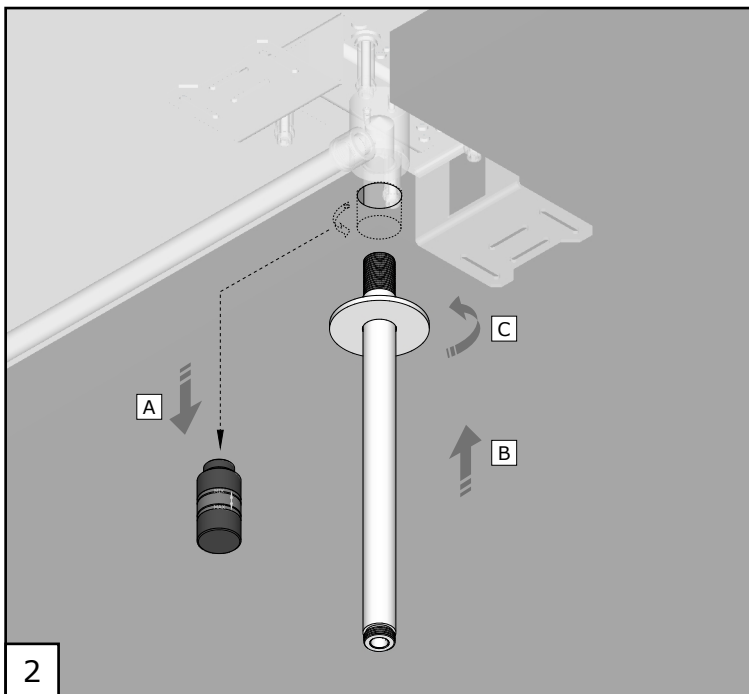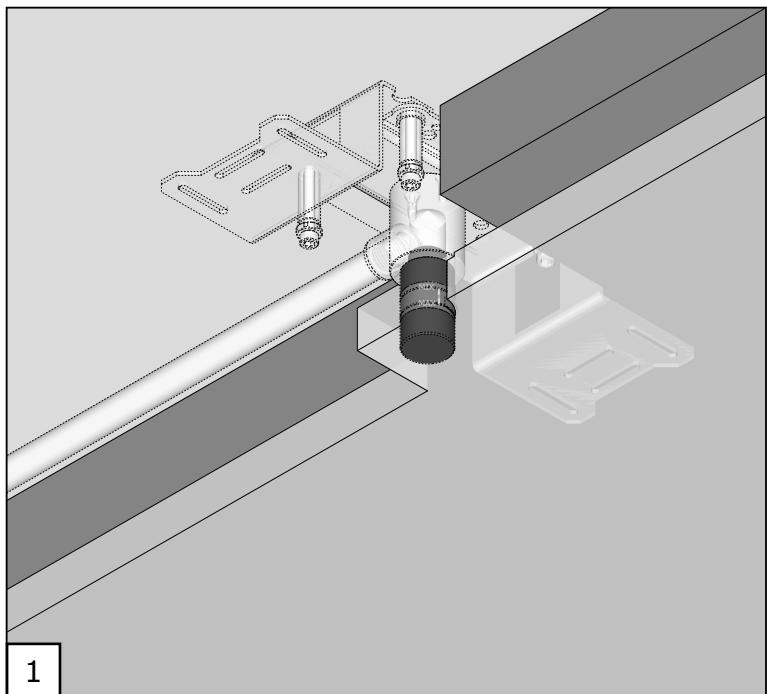

# John Pawson by COCOON

JP-31

## TECHNICAL WARNING

The pipes have to be rinsed thoroughly before installation to avoid pressure differences.

Use of a pressure reducer when static pressure is higher than 5 bar to avoid damage to the product.

TEMPERATURA DI ESERCIZIO / WORKING TEMPERATURE

 max. 70 °C  
 max. 158 °F